

269R/270R/269SN HOLD-UP DEVICES



Honeywell's series of hold-up devices have been designed for silent operation. Available in a stainless steel cover or hardwired, V-Plex® and wireless versions, they mount quickly and easily in discreet locations. They are ideally

suited for use in locations such as banks, jewelry stores, retail establishments or any situation that requires hold-up notification.

FEATURES

- Silent operation
- Double-pole double-throw contacts for multi-notifications
- Twin 45° screw terminals with EOL resistor splicing terminal
- Adhesive pads for temporary positioning while installing
- Stainless steel cover (269R and 269SN)
- Fully supervised
- Convenient reset key for testing and/or reset of alarm

269R/270R/269SN

HOLD-UP DEVICES

SPECIFICATIONS

Switch type

- Plunger type DPDT

Switch action

- Selectable latching or momentary

Switch Rating

- 0.2A @ 30VDC max.

Connections


- Four position 45° screw terminal block for each output side with EOL resistor splicing terminals

Operating Temp

- 14° F to 140° F
(-10° to 60°C)

Dimensions

- 3.5" L x 2.0" W x 1.25" D
- Listed for UL636 Hold-Up alarm units and systems

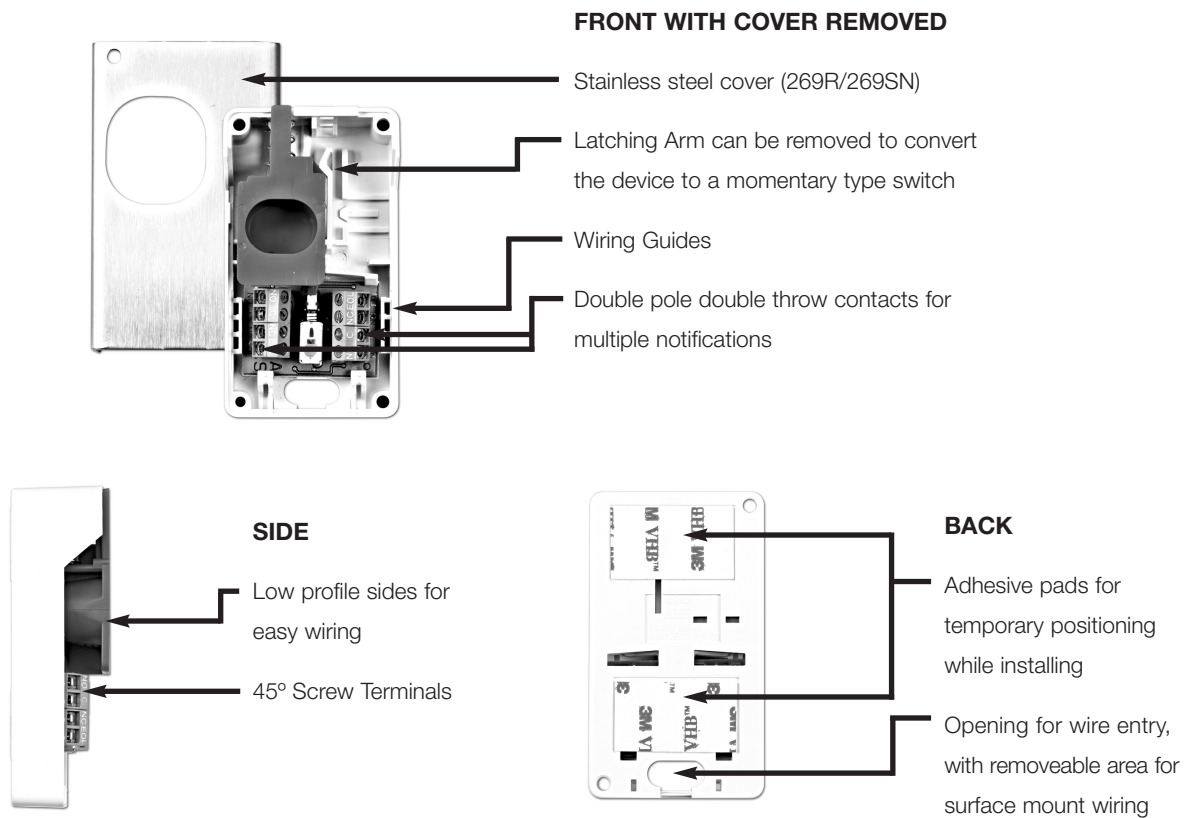

ORDERING

269R	Hardwired Hold-Up Switch with stainless steel cover
270R	Hardwired Hold-Up Switch in plastic case
269SN	V-Plex Hold-Up Switch with stainless steel cover (polling loop only)
5869	5800 Series Wireless Hold-Up Switch

For more information: www.honeywell.com/security/hsc

Automation and Control Solutions
Honeywell Security & Communications
2 Corporate Center Dr. Suite 100
Melville, NY 11747
1.800.467.5875
www.honeywell.com

Honeywell

L/6160CR/D
May 2009
© 2009 Honeywell International Inc.